

Grind Resistant (GR) Sensor Installation Quick Start Guide



GR Sensor

Ensure sensor label is visible and record sensor number.



Core

Core a hole 4" in diameter and up to 7" in depth.



Clear Hole and Apply Epoxy

Vacuum hole clear of debris. Ensure hole is dry. Fill bottom of hole with epoxy.



Place Sensor and Apply Epoxy


Place sensor with label up and pointing in the direction of traffic on top of the epoxy. Cover top of sensor with epoxy. Let epoxy set for up to four minutes.

Add Filler

Fill hole with cold patch until fill compacts evenly to the existing road surface. (Refer to the depiction on the following page.)

IMPORTANT: GR sensors are **not** removable and they are **not** reusable.

GR Sensor Quick Start Guide

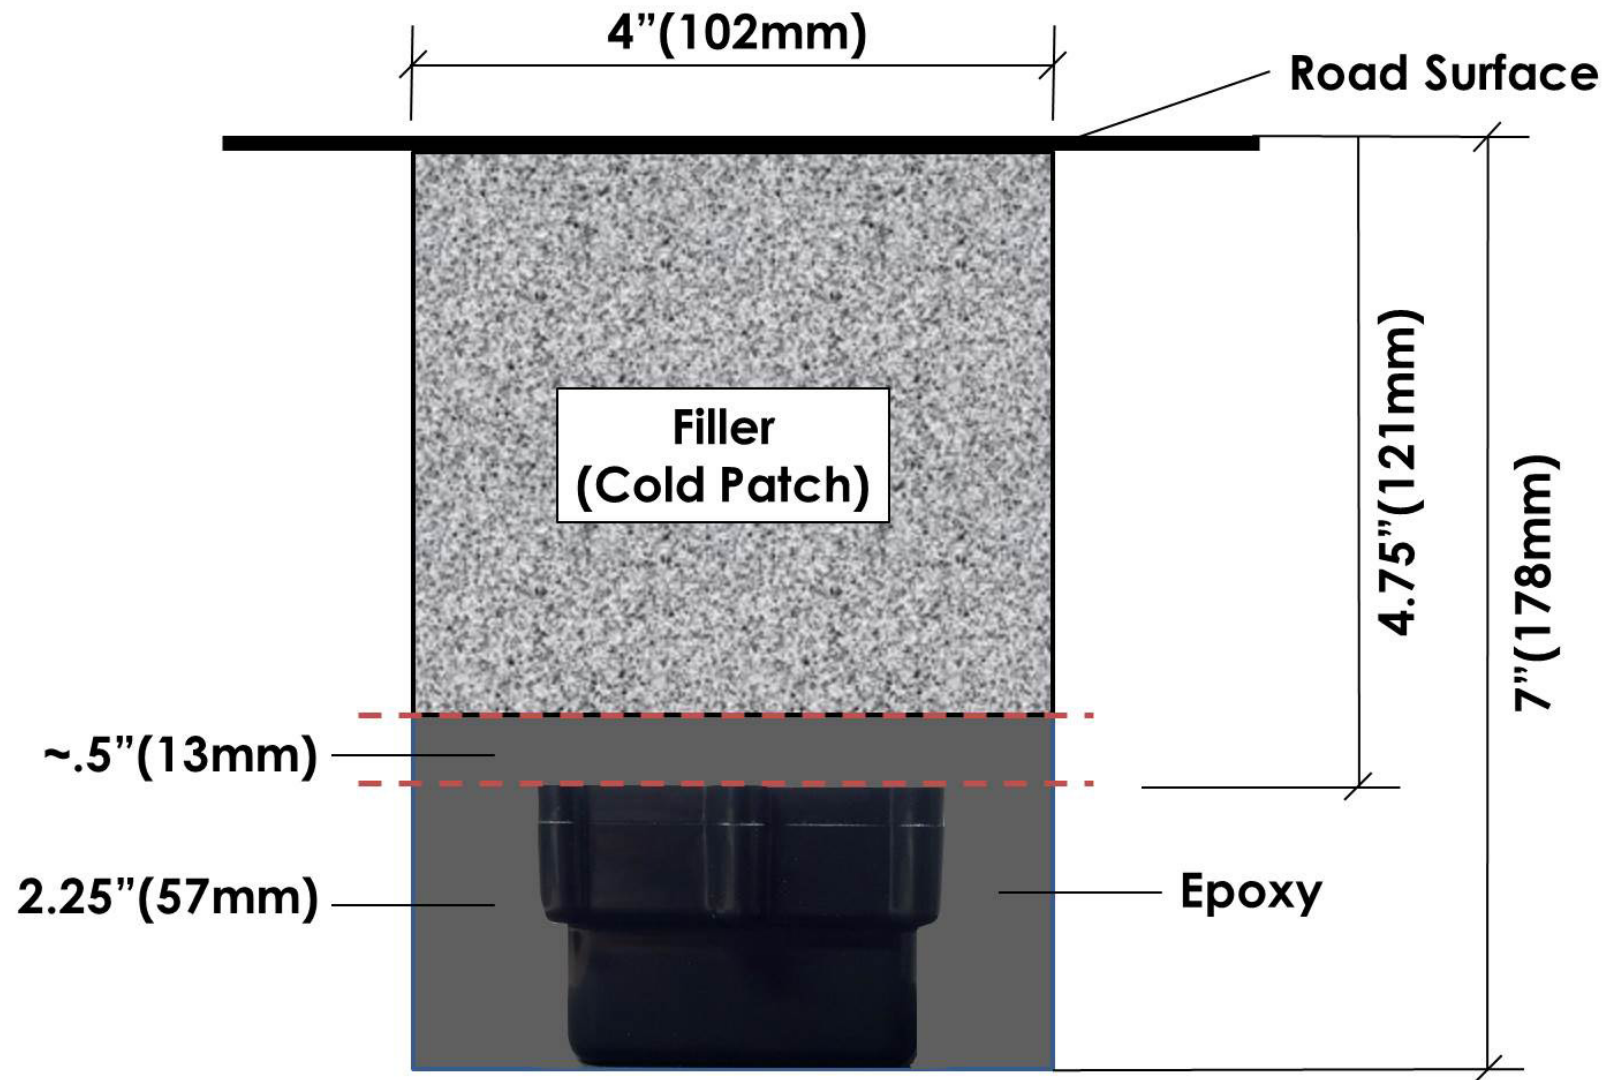

Local Distributor